

DS-K1T Series Standalone Terminal ehome configuration


DS-K1T Series Standalone Terminal ehome configuration

Operation Process

- 1) Add device through TCP/IP.
- 2) Modify network center setting
- 3) Modify uploading mode
- 4) Add device again through EHOME protocol (not support sync face picture)

Operation Steps:

1. Add device through TCP/IP.



- a) Open Access Control module, click
- b) Add device from list in the bottom, if the device is not activated, please activate first.

The screenshot shows a table titled 'Online Device (11)'. At the top, there are several action buttons: '+ Add to Client', '+ Add All', 'Modify Netinfo', 'Reset Password', and 'Activate'. The 'Add to Client' button is highlighted with a red box and an arrow. Below the buttons is a table with the following columns: IP, Device Type, Firmware Version, Security, Server Port, Device Serial ..., and Start Time. The first row is highlighted with a red box around the IP address '10.9.98.38'.

IP	Device Type	Firmware Version	Security	Server Port	Device Serial ...	Start Time
10.9.98.38	DS-K1T201MF-C	V2.0.0build 180129	Active	8000	DS-K1T201MF...	2018-09-10 13:47:03
10.9.98.38	DS-K1T201MF-C	V2.0.0build 180129	Active	8000	DS-K1T201MF...	2018-09-10 13:47:03
10.9.98.38	DS-K1T201MF-C	V2.0.0build 180129	Active	8000	DS-K1T201MF...	2018-09-10 13:47:03
10.9.98.38	DS-K1T201MF-C	V2.0.0build 180129	Active	8000	DS-K1T201MF...	2018-09-10 13:47:03

- c) Input device nickname and activation password, select Synchronize the time

The screenshot shows a dialog box titled 'Add'. Under 'Adding Mode', the 'IP/Domain' radio button is selected. Below this, there are several input fields: 'Nickname' (containing 'K1T201'), 'Address' (containing '10.9.98.38'), 'Port' (containing '8000'), 'User Name' (containing 'admin'), and 'Password' (containing '*****'). The 'Synchronize Device Time' checkbox is checked and highlighted with a red box. At the bottom, there are 'Add' and 'Cancel' buttons.

2. Modify network center setting

DS-K1T Series Standalone Terminal ehome configuration

- a) Double click device then go to network settings, modify the network center setting.
- b) Address Type: Server domain name or IP Address
IP address: input server IP address
Port: default 7660 for iVMS-4200 client software,
Account: support any letters or digit, then click Save, it will prompt succeed.

The screenshot shows the 'Modify' configuration window with the 'Network Center' tab selected. The left sidebar contains a menu with 'Network Settings' highlighted. The main area has the following fields:

- Center Group: Center1 (dropdown)
- Address Type: IP Address (dropdown)
- IP Address: 10.9.98.25 (text input)
- Port: 7660 (text input)
- Protocol Type: EHome (dropdown)
- Account: morgen (text input)
- Save button

3. Modify uploading mode

- a) Select Uploading Mode, and select Enable, Main Channel select N1, and click Save, it will prompt succeed.


The screenshot shows the 'Modify' configuration window with the 'Uploading Mode' tab selected. The left sidebar contains a menu with 'Identity Terminal...' highlighted. The main area has the following fields:

- Center Group: Center Group1 (dropdown)
- Enable
- Uploading Mode:
- Main Channel: N1 (dropdown)
- Backup Channel: Close (dropdown)
- Save button


4. Add device again through EHOME protocol

- a) Delete the device from list which is added just now.
- b) Click add and input nickname and Account, and select Synchronize Device Time, click Add and it will prompt succeed.

DS-K1T Series Standalone Terminal ehome configuration

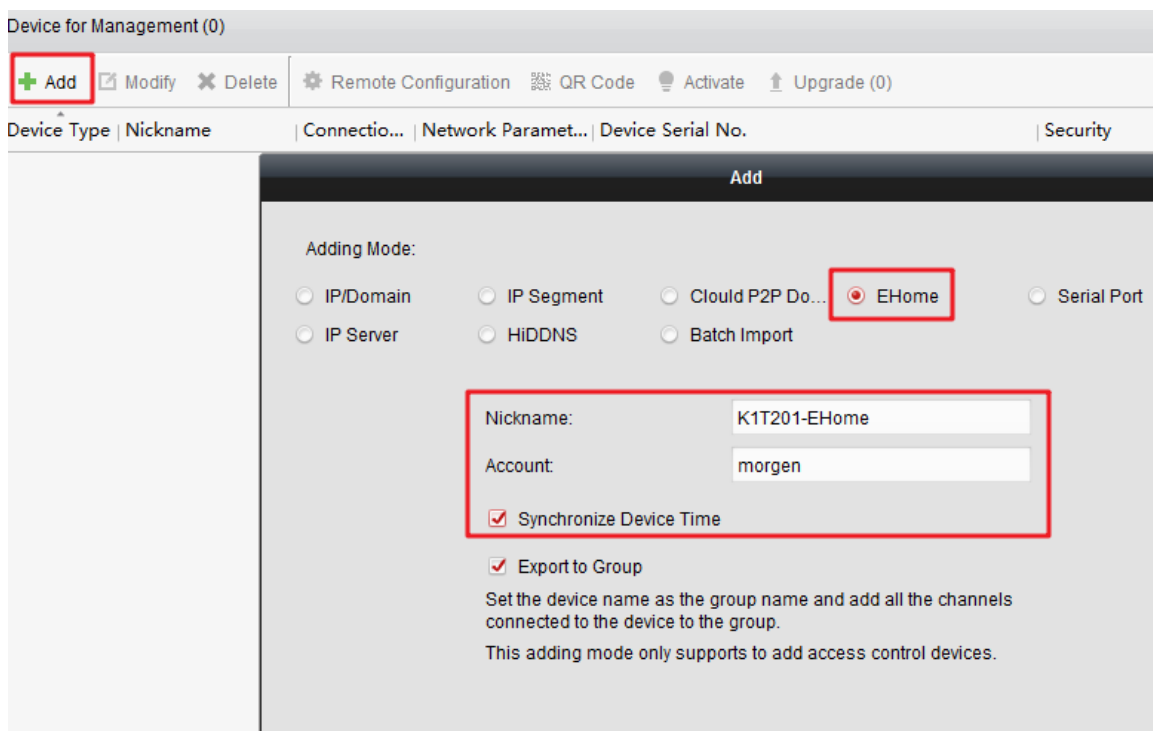

c) If add successfully, we can find device serial number and device online status from list. Other operations are the same.

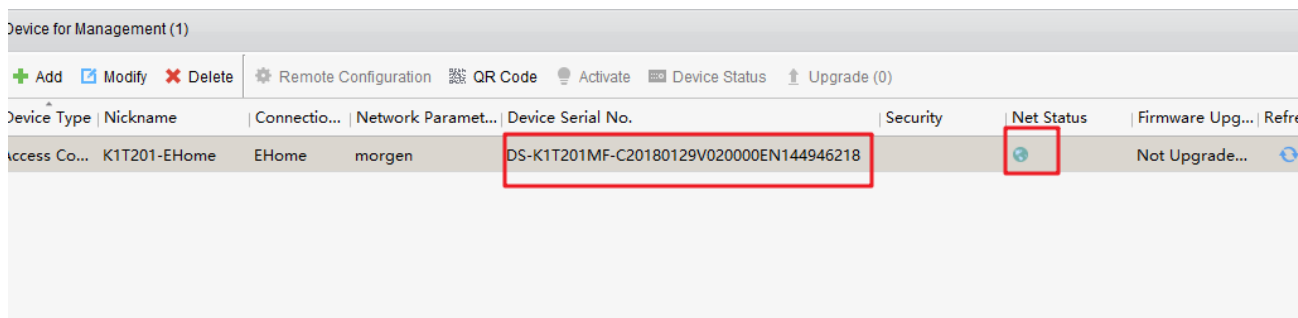

Suitable Models:

Model	Description
DS-K1T105	Standalone Access Control Terminal
DS-K1T201	Standalone Access Control Terminal